



Data Sheet

ADMIRE LED Mirror



General Description: The ADMIRE LED Mirror from Stylmark combines budget-friendly design with flattering soft white LED lighting to a full-length mirror perfect for fitting rooms. Available with or without wings, the simple styling will fit almost any decor. With the compact depth of the ADMIRE LED Mirror, fitting into your smaller rooms won't be a concern. Complement the fitting room experience and ease the buying decision with Stylmark's ADMIRE LED Mirror.

Applications: Clothing and attire retail fitting or dressing rooms

Standard Model	Description	Overall Dimensions
620105-01-OBWHT40111	Admire LED Mirror – White (Hardwired)	28.38" x 60.75" x 2.00" (28" x 60" glass size)
620105-02-OBWHT40111	Admire LED Mirror – White (Hardwired, On/Off Switch)	
620105-03-OBWHT40111	Admire LED Mirror – White (Plug-in Cord)	
620105-04-OBWHT40111	Admire LED Mirror – White (Plug-in Cord, On/Off Switch)	
620105-05-OBWHT40111	Admire LED Mirror – White (Low Light, Hardwired, On/Off Switch)	
620105-06-OBWHT40111	Admire LED Mirror – White (Low Light, Plug-in Cord, On/Off Switch)	
Accessory Items	Description	Overall Dimensions
620106-OBWHT40111	Admire Wing - White	14.38" x 60.75" x .500" (14" x 60" glass size)
520078-OBWHT40111	Admire 45° Wing Bracket	11.50" x 9.00" x 3.00"
520079-OBWHT40111	Admire 60° Wing Bracket	13.87" x 6.50" x .3.00"
520075	Cleat Mounting Accessory Kit	N/A



ETL Listed
Tested to UL Standard 962
and CSA C22.2 No. 250.0-08

Customizable size, paint color, CCT, illumination & power connection options available. Contact your Stylmark representative for additional options.

Standard Model Specifications:

Frame: Steel, powder-coated
Finish: White (standard)
Mirror: ¼ in. clear mirror with pencil ground edges
 2¼ in. wide etched sidelights
 Category 1 safety backing
Mounting: Direct wall mount (fasteners rated to 75 lbs -obtain locally)
 Cleat mounting accessory kit (part #520075) is also available

Lighting Specifications:

Source: LED
Average Rated Life: 50,000 hours (L70)
Color Temperature: 3000K (soft white)
Color Rendering Index: 85+
Illuminance¹: Standard brightness models: 50 f.c. (typical)
 Low light brightness models: 20 f.c. (typical)

Power Requirements:

Input Voltage: 100~240VAC, 50~60Hz
AC Current: 1.2A@115VAC (typ.)
Nominal Wattage (LED): 33W @ 12Vdc
Connection: Hardwire to internal power supply (standard)
 Options: cord/plug, power switch

¹ Measurements taken at a distance of 18" from the midpoint of the mirror.

In order to continually improve our products, Stylmark reserves the right to make changes to specifications or materials without prior notice.


Sheet# 971827
Revision G (3/18)

Model 620106



1/4" Mirror Glass



Model 620105




2-1/4" Etched Sidelights

Admire LED Mirror with 45° Wings

(620105 & 620106 Models Shown)


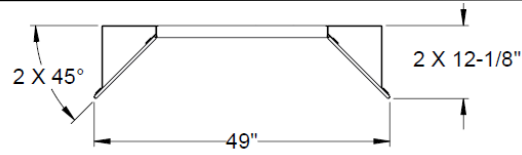


Part # 520078-OBWHT40111 - 45° Wing Bracket

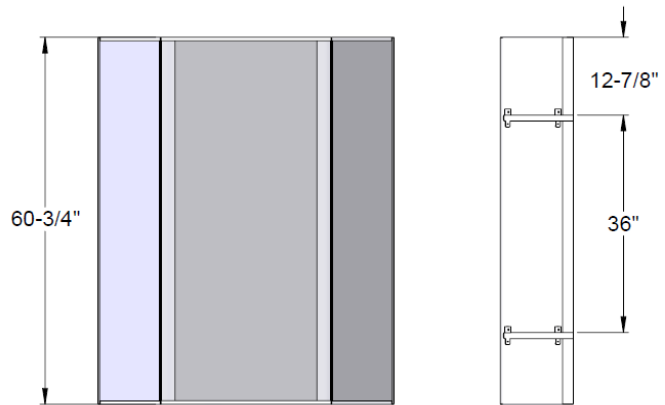


Admire LED Mirror with 60° Wings

(620105 & 620106 Models Shown)

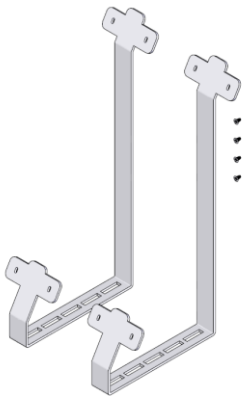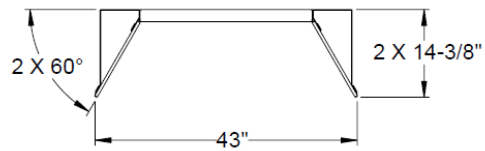

Part # 520079- OBWHT40111 - 60° Wing Bracket

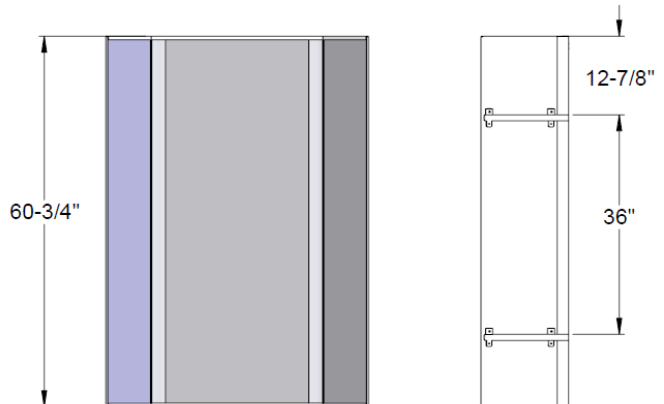

Sheet# 971827
Revision G (3/18)