

Fitting Room Extrusions & Hardware

Stylmark offers sturdy, high-quality fitting room systems designed to fit together easily and quickly allowing for rapid field installation. With the flexibility of our post-and-panel system, you can create unique, cost-effective and modular designs in numerous store areas.

Mirror Kits and Assemblies


Proper fitting room lighting is key and helps the shopper to see clothing the same way they would at home. Lighted Mirror Solutions from Stylmark are designed to soften the light directed on the body. Choose from stylish options for every design budget.

Fitting Rooms	2
Mirror Solutions	<u>5</u>
Admire LED Mirror	8
Mirror Kits	<u>10</u>
Tri-Vue Mirror Frames	<u>11</u>
Mirror Frames	<u>13</u>
Mirror Trims	<u>15</u>



Fitting Rooms


Stylmark offers components and hardware that can be used to create a variety of custom fitting room configurations. Fitting room extrusions are sold in stock length material or material may be fabricated to meet your specific requirements.

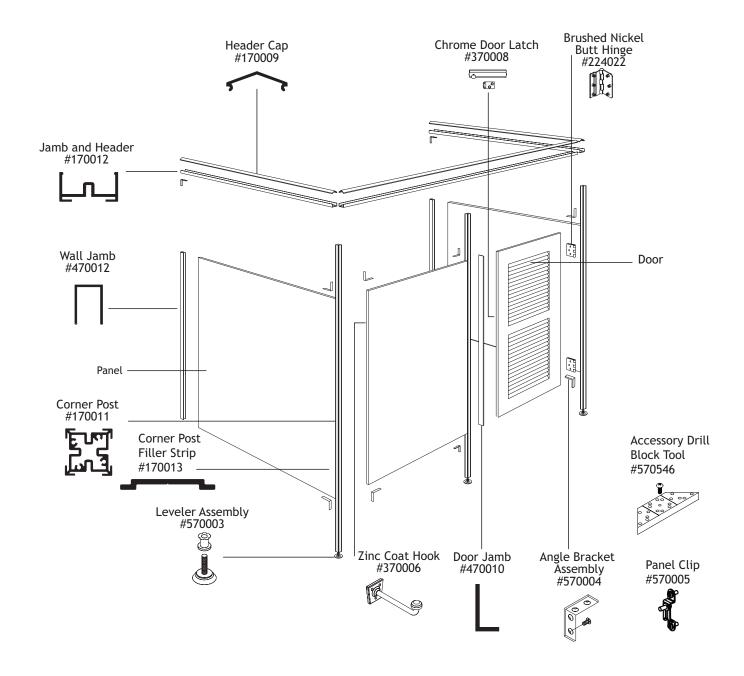



Notes:

- Panel and door provided by other
- Accessory Drill Block Tool Part #570546

Fitting Rooms









Alternate method to angle brackets #570004 to conceal hardware from view

Part #170012 Jamb and Header Stock Length = 144"




Part #170009 Header Cap Stock Length = 144"




Part #170011 Corner Post Stock Length = 84"

Part #170014 Corner Post Stock Length = 146"




Part #470010 Door Jamb with Slots Stock Length = 84"




Part #470012 Wall Jamb with Holes Stock Length = 144"

Part #170008
Wall Jamb without Holes
Stock Length = 144"



Part #170013 Corner Post




 $\sqrt{\ }$ = finished surface Drawings are not to scale




Fitting Rooms


Part #224022
Brushed Nickel Butt Hinge
Use for heavier doors.




Part #370006 Zinc Coat Hook



Part #370008 Chrome Door Latch




Part #570003 Leveler Assembly Used to assure easy adjustability.




Part #570004


Angle Bracket
Bracket supports can be used to attach
panels to posts. Anodized to match.
(includes bracket and two screws)



Part #570005
Panel Clip Kit
Used as an alternative method of attaching panels to posts.
Includes hardware and 4 clips.





Part #570546 Accessory Drill Block Tool



Mirror Solutions - BEVEL

Featuring a frame which tapers back towards the wall, BEVEL presents a unique appearance. The LED-lit BEVEL Mirror also features flush, etched lights on each side of the mirror face. The LED-lit BEVEL Mirror is selectable with hard-wire (wire per NEC and applicable local codes) or plug-in option.





Mirror Size (O.D)

	Model #	Description	
•	620095-01	BEVEL: Single Pane Mirror with Mounting Hardware	28" x
Ī			

620095-01	BEVEL : Single Pane Mirror with Mounting Hardware	28" x 60" (28-3/4" x 60-1/4")
620095-03	BEVEL : Single Pane Mirror with Mounting Hardware	36" x 72" (36-3/4" x 72-1/4")
620096-01	BEVEL: LED-Lit, Single Pane Mirror with Mounting Hardware	28" x 60" (28-3/4" x 60-1/4")
620096-03	BEVEL: LED-Lit, Single Pane Mirror with Mounting Hardware	36" x 72" (36-3/4" x 72-1/4")

Construction Specifications:

Nominal Length

• 60" or 72"

Frame Material

• Anodized Aluminum

Frame Finish

• See Stylmark Color Library

Mirror

• 1/4" Clear Mirror with Pencil Ground Edges & Category 1 Safety Backing

LED Lighting Specifications (Model 620096):

Color Temperature

• 3000K, 3700K, 4200K

Nominal Wattage

• 32.5W or 39W

Color Rendering Index


• 85


MIRRKT



Mirror Solutions - PIVOT

PIVOT features adjustable wing mirrors to allow viewing from multiple angles. The wing mirrors attach with seamless hinges which eliminate pinch points. The LED-lit PIVOT Mirror also features flush, etched lights on each side of the center mirror face. The LED-lit PIVOT Mirror is selectable with hard-wire (wire per NEC and applicable local codes) or plug-in option.





Model #	Description	Mirror Size (O.D)
620097-02	PIVOT : Triple Pane Mirror with Mounting Hardware	18" (wing) x 28" x 72" (66-1/4" x 72-1/4")
620098-02	PIVOT : LED-Lit, Triple Pane Mirror with Mounting Hardware	18" (wing) x 28" x 72" (66-1/4" x 72-1/4")

Construction Specifications:

Nominal Length

• 72"

Frame Material

· Anodized Aluminum

Frame Finish

• See Stylmark Color Library

Mirror

• 1/4" Clear Mirror with Pencil Ground Edges & Category 1 Safety Backing

LED Lighting Specifications (Model 620098):

Color Temperature

• 3000K, 3700K, 4200K

Nominal Wattage

• 32.5W or 39W


Color Rendering Index

• 85

MIRRKT

Mirror Solutions - TILT

The LED Tilt Mirror is designed to be a full-view, framed mirror that can be installed in a leaning fashion. Like all Mirror Solutions by Stylmark, the LED Tilt mirror is available in Stylmark's wide variety of anodized finishes and color temperatures.

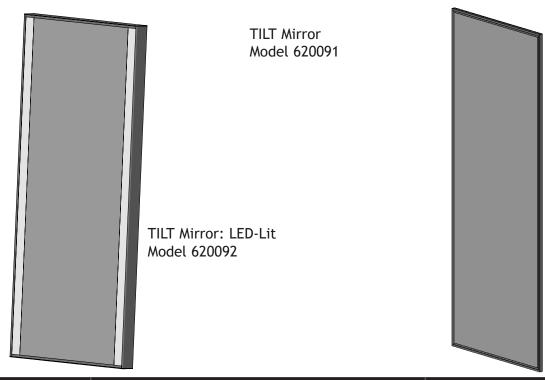

Model #	Description	Mirror Size (O.D)
620091-01	TILT : Single Pane Mirror with Mounting Hardware	28" x 60" (29" x 61")
620091-02	TILT : Single Pane Mirror with Mounting Hardware	28" x 72" (29" x 73")
620091-03	TILT : Single Pane Mirror with Mounting Hardware	36" x 72" (37" x 73")
620092-01	TILT: LED-Lit, Single Pane Mirror with Mounting Hardware	28" x 60" (28-1/4" x 60-1/4")
620092-02	TILT: LED-Lit, Single Pane Mirror with Mounting Hardware	28" x 72" (28-1/4" x 72-1/4")
620092-03	TILT: LED-Lit, Single Pane Mirror with Mounting Hardware	36" x 72" (36-1/4" x 72-1/4")

Construction Specifications:

Nominal Length

• 60" or 72"

Frame Material

Anodized Aluminum

Frame Finish

• See Stylmark Color Library

Mirror

• 1/4" Clear Mirror with Pencil Ground Edges & Category 1 Safety Backing

LED Lighting Specifications (Model 620092):

Color Temperature

• 3000K, 3700K, 4200K

Nominal Wattage

• 32.5W or 39W

Color Rendering Index


• 85

MIRRKT



Admire LED Mirror

The ADMIRE LED Mirror from Stylmark combines budget-friendly design with flattering soft white LED lighting to a full length mirror perfect for fitting rooms. The simple styling will fit almost any decor. With the compact depth of the ADMIRE LED Mirror, fitting into your smaller rooms won't be a concern. Complement the fitting room experience and ease the buying decision with Stylmark's ADMIRE LED Mirror.

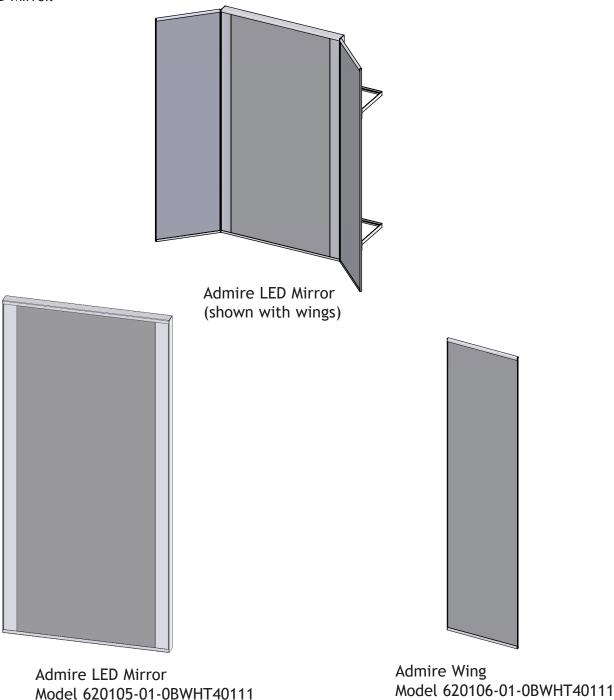

Admire LED Mirror

Model #	Description	Mirror Size (O.D)
620105-01-0BWHT40111	Admire LED Mirror- White (Hardwired)	
620105-02-0BWHT40111	Admire LED Mirror- White (Hardwired, On/Off Switch)	
620105-03-0BWHT40111	Admire LED Mirror- White (Plug-in Cord)	28" x 60" glass size (28.38" x 60.75" x 2.00")
620105-04-0BWHT40111	Admire LED Mirror- White (Plug-in Cord, On/Off Switch)	
620105-05-0BWHT40111	Admire LED Mirror- White (Low Light, On/Off Switch)	
620105-06-0BWHT40111	Admire LED Mirror- White (Low Light, Plug-in Cord, On/Off Switch)	
620105-07-0BWHT40111	Admire LED Mirror- White (Plug-in Cord, On/Off Switch)	28" x 72" glass size (28.38" x 72.75" x 2.00")
620106-01-0BWHT40111	Admire Wing	14" x 60" glass size (14.28" x 60.78" x .500")
620106-02-0BWHT40111	Admire Wing	14" x 72" glass size (14.28" x 72.78" x .500")
520078-0BWHT40111	Admire 45° Wing Bracket Kit (one kit required per wing, contains two brackets)	11.50" x 9.00" x 3.00"
520079-0BWHT40111	Admire 60° Wing Bracket Kit (one kit required per wing, contains two brackets)	13.87" x 6.50" x 3.00"

Construction Specifications:

Nominal Length

• 60" or 72"

Frame Material

• Steel

Frame Finish

• White powder-coated

Mirro

• 1/4" Clear Mirror with Pencil Ground Edges & Category 1 Safety Backing

LED Lighting Specifications:

Color Temperature

• 3000K (soft white)

Brightness

• 900 lumens (Models with low light option are 400 lumens)


Color Rendering Index

• 85+



Fitting Room Mirror Kits

Model #	Description	Pane Dimensions
620083	Single Pane Mirror Kit	28" x 72"
620084	Single Pane Mirror Kit	28" x 60"
620085	Triple Pane Mirror Kit	19" (wing) x 28" x 72"

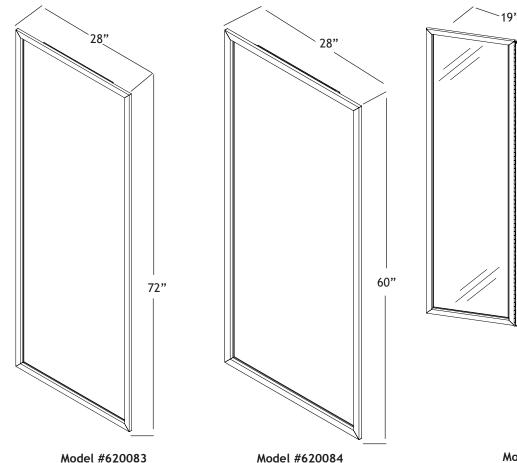

Single Pane Mirror Kit

28"x60"

72"

Model #620085 Triple Pane Mirror Kit 19"(wing)x28"x72"

MIRRKT

Single Pane Mirror Kit

28"x72"


Tri-Vue Mirror Frames

Stylmark designed our Tri-Vue Mirror Frames to maximize mirror space without metal mullions to obstruct the view. Each wing opens silently at the touch of the finger and a discreet steel pivot hinge provides increased stability. Frames components can be fabricated to meet custom size requirements.

Ordering Tri-Vue Mirror

Model #	Description	Pane Dimensions
	Left Wing Width	
620033	Tri-Vue Mirror	Right Wing Width
620033		Center Panel Width
		Overall Height

Part #620033 Tri-Vue Mirror Assembly

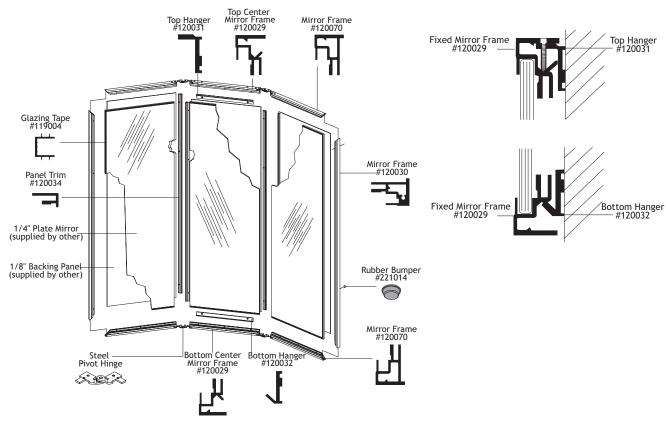


Notes:

- Wings should not exceed 22" in width or 45 pounds in weight (equivalent to a 22" x 84" wing panel glazed with a 1/4" mirror).
- Extra lead time may be required for mirrors with wings exceeding 22" x 66".
- Mirror wings should not exceed 45 lbs.
- Contact Stylmark Customer Care for assistance with glass sizes.

TV01



Tri-Vue Mirror

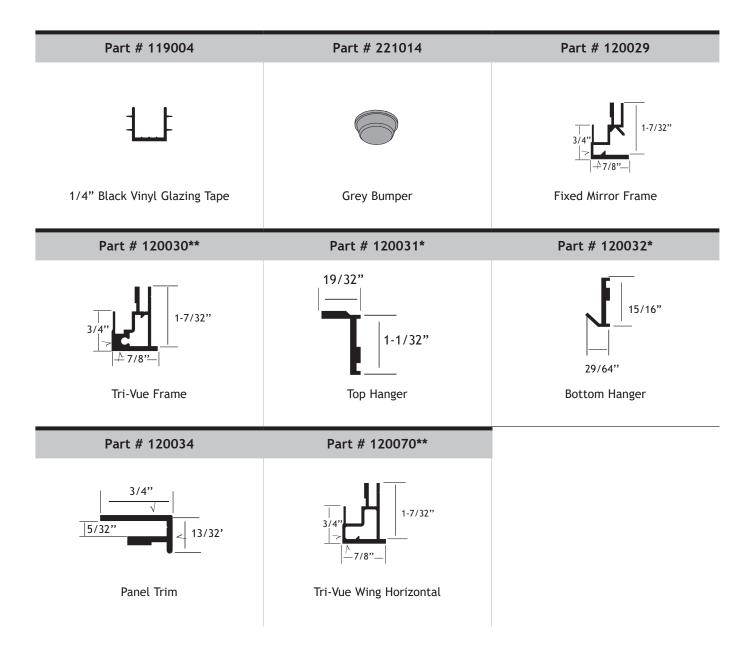

Notes: • * Stock Length is 124"

• ** Stock Length is 137"

 $\sqrt{\ }$ = finished surface Drawings are not to scale

TV01


Mirror Frames

Stylmark's mirror frames allow for easy assembly, glazing and installation on-site. When placed in the mounting bracket, the installed mirrors are theft-proof. Mirror frame components are sold in 12' stock lengths or material may be fabricated to meet your specific requirements.

Ordering Mirror Frames

Model #	Description	Dimension: Width x Height
620062	Mirror Frame	Provide Mirror or Frame Dimensions

Part #620062 Mirror Frame Assembly

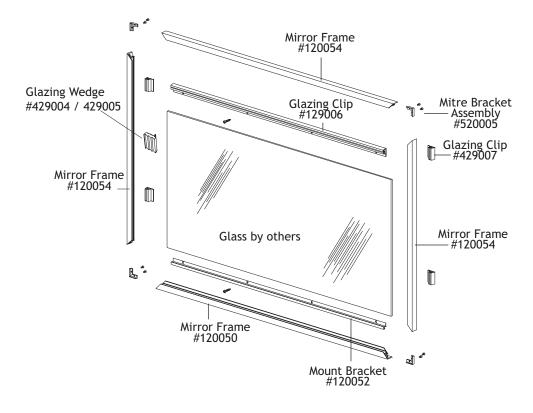


Notes:

- Frame size min / max dimensions are 10" x 144"
- Mirror sizes will be provided on order acknowledgement from Stylmark
- Mirror frame materials can be ordered in 12 foot lengths for customer fabrication

MIRR01




Mirror Frames

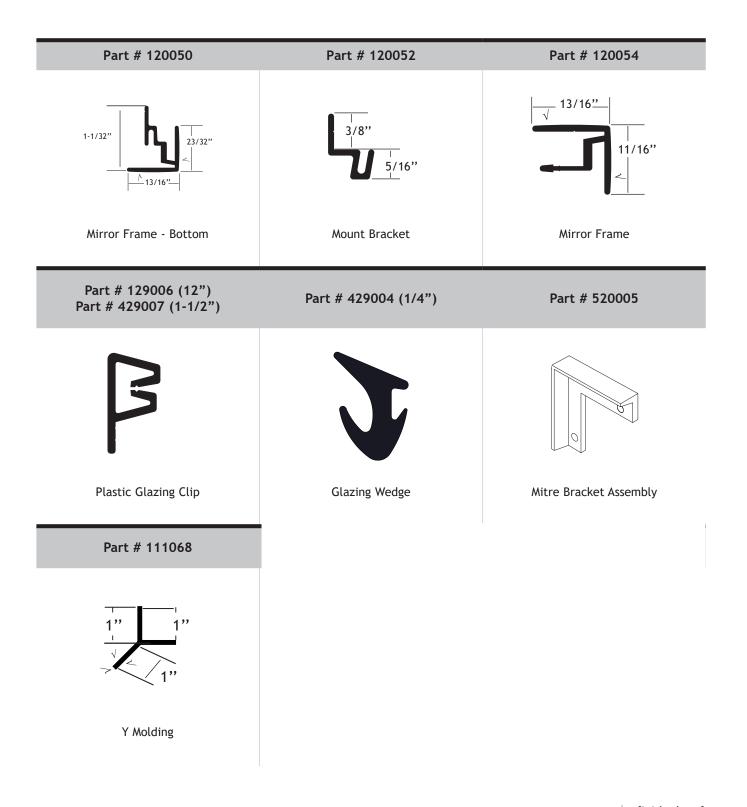


 $\sqrt{\ }$ = finished surface Drawings are not to scale

Mirror Trims


Stylmark's Mirror Trims offer beautiful options for protecting and trimming mirrors and mirrored walls. Our J-Molding may be used at the top and bottom of a floor to ceiling mirror application. When a horizontal or vertical accent is required, use one of our two Divider Trims. Mirror Trim products may be ordered in 12 foot stock lengths or pre-cut to your desired length.



Stylmark's J-Molding and Divider Trims feature a raised ridge to protect the mirror backing.



To install, simply position the mirror into the top channel, and then lower it into the bottom channel.

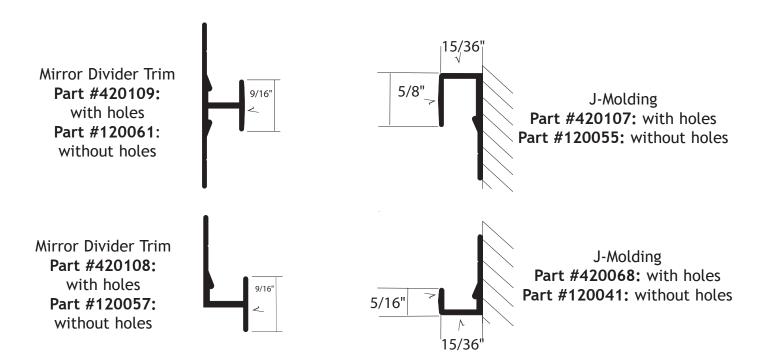


 $\sqrt{\ }$ = finished surface Drawings are not to scale



Mirror Trims


Part #420110: Corner Column Trim with slots
Part #120063: Corner Column Trim without slots
This Mirror Trim features slotting measuring
9/64" x 39/64". Slots are set 1" on center,
beginning 18" from one end and continuing for
another 66". It accepts Capital B-line (2300 series)
and Crown Le-Mans series brackets (by others). This
molding will not accept K.V. Bracket 160 or 161.

Part #410466: Recessed Trim Base
Design a mirrored wall with your
favorite Stylmark Trim Maker shapes.
By using this recessed trim base, a 1/4"
mirror fits perfectly between your wall
and our trim. See our Architectural
Trim and Moldings brochure for choices
of trims.

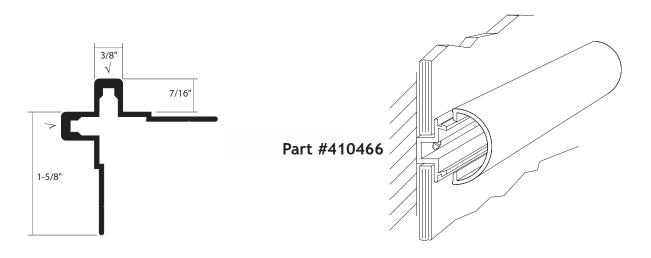

Part #120064

1-1/2" Radius Column Corner Trim This Mirror Trim provides a radiused corner with stepped reveal and has been developed especially for 3/4" panels.



 $\sqrt{\ }$ = finished surface Drawings are not to scale

TV01

Mirror Trims

Part #110669 Part #111068 Part #120058 3/4" Column Edge Y Molding Column Edge Trim 3/8" 1.088" 13/16" ____ 1/8" _1/8" 2-1/4" Part #120065 Part #120066 Part #120067 90° Outside Corner Trim 90° Column Trim 135° Column Trim 5/8" 3/8" 9/32" 9/32" Part #120059 Part #120062 90° Outside Corner Trim 45° Column Trim 7/32" 1/16" 5/16" 7/8" 5/8" $\sqrt{\ }$ = finished surface Drawings are not to scale MIRR01